



WPY 6/F1/K Multifunctional Scale

More information on the website
radwag.com/en/info,w1,04N



WPY 6/F1/K Multifunctional Scale

The drawings, photos and graphics used are for illustrative purposes only.

Functions



Dosing



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Peak hold



Formulation



Newton unit measurement



Statistics



Checkweighing



IR sensors



Animal weighing



Differential weighing



ALIBI Memory

Datasheet

	WPY 6/F1/K Multifunctional Scale
Metrological parameters	
Maximum capacity [Max]	6 kg
Minimum load	40 g
Readability [d]	2 g
Tare range	-6 kg
Max readability for non-verified scale	0,2 g
Stabilization time	2 s
Adjustment	external
OIML Class	III
Physical parameters	
Display	5,7" Resistiv-Farb-Touchscreen
Weighing pan dimensions	300×300 mm
Packaging dimensions	570×390×170 mm
Net weight	5,3 kg
Gross weight	6,1 kg
Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	-10 ÷ +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Extra payment for verification



Accessories

Transponder card readers
RS 232 cables (scale - printer)
Barcode scanners
Cigarette lighter receptacle power supply cables
Antivibration Tables
RS 232, RS 485 cables
Power Adapters
USB Hubs
Label Printers
Displays



IN/OUT Cables
Keypad, external switches
Stands, wall mounting kits and mounting brackets
Receipt Printer
F1 Mass Standard - knob weights without adjustment chamber, set
AP2-1 Current Loop Unit
RS 232, RS 485 cables
Additional Weighing platforms Module
RS 232 – USB Converter
RS 232 cables (scale - printer)

Software

E2R System
Audit Trail Reader
Label Editor R02
R-LAB
RADWAG Development Studio

RAD-KEY
LabVIEW Driver
RADWAG Remote Desktop
Scales Editor 2.1
R.Barcode

Device dimensions

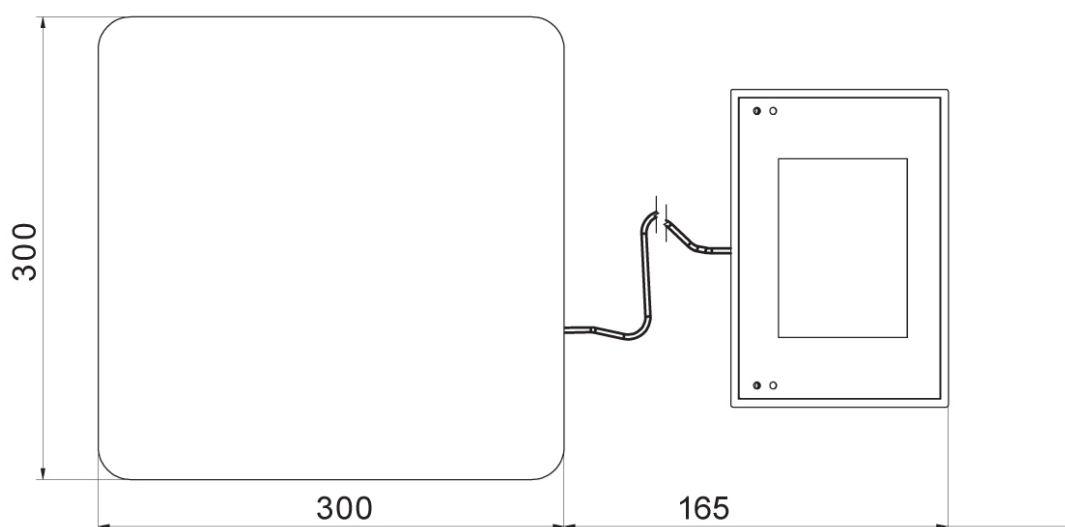

WPY F1/K